




TRIPLE AXLE / DRIVER SIDE

REPLACE THE SIDE. KEEP THE SYSTEM.

One driver side harness. Match the connector types and branch spacing before ordering.

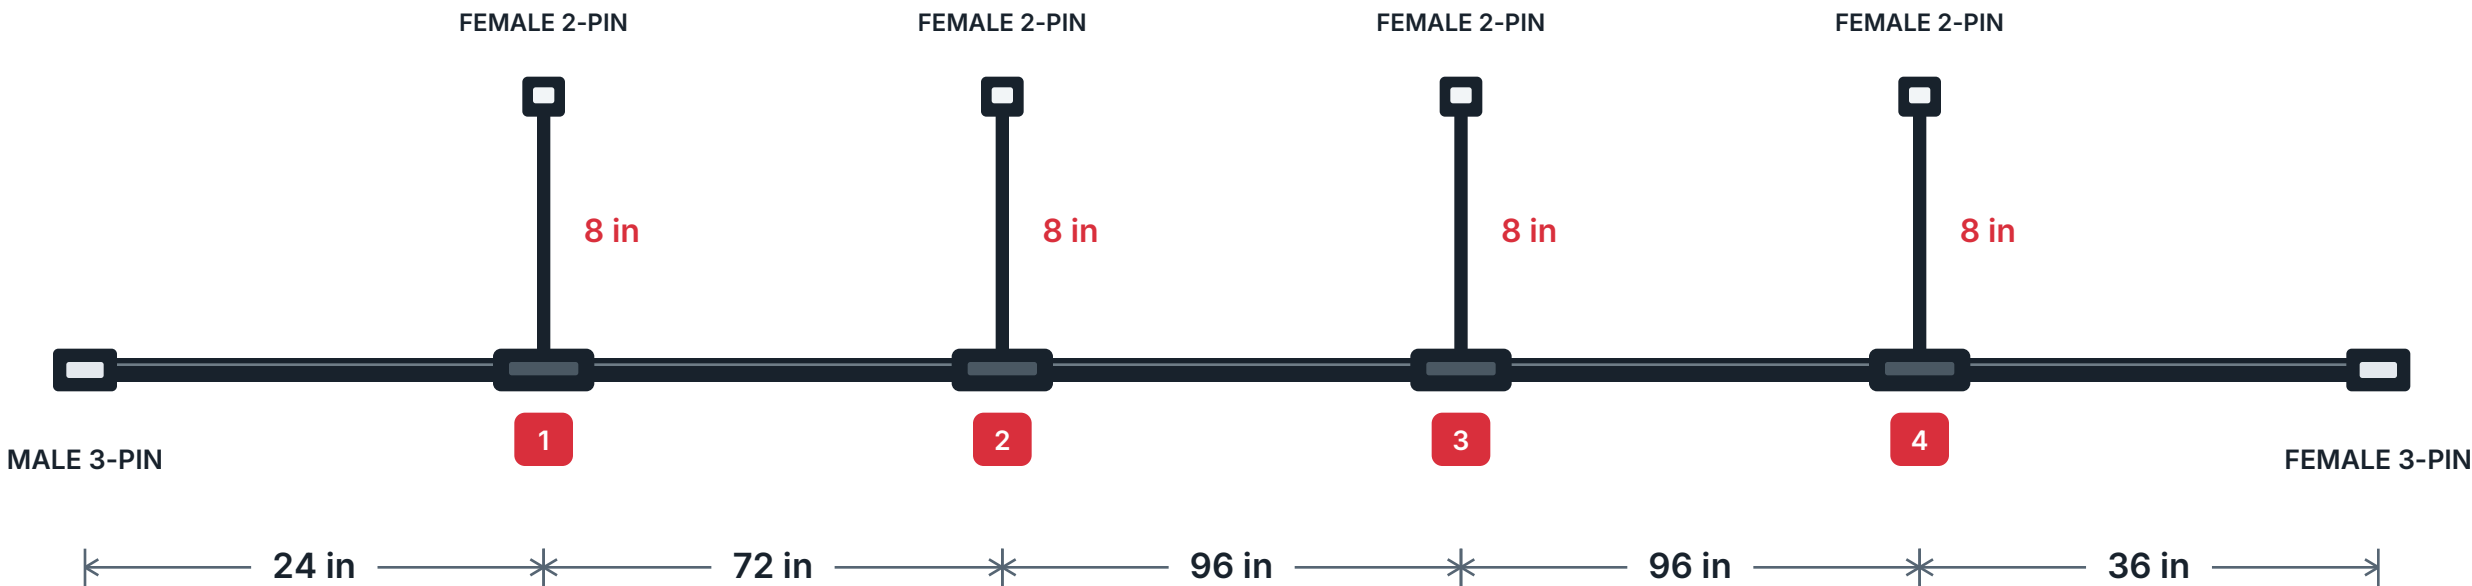

MAIN-RUN SEGMENTS

$24 + 72 + 96 + 96 + 36 = 324 \text{ in}$

Calculated sum of the labeled spans; connector datum convention is not defined in the source.

MAIN CABLE	BRANCH LEADS	EACH BRANCH	JUNCTIONS
3 conductors / 18 AWG	2 conductors / 18 AWG	8 in / female 2-pin	4 branch locations

NOT TO SCALE | Dimensions in inches | Wire colors and pin assignments are not specified in the source.

18 AWG conductors. Match connector types and branch spacing to your existing harness.